

CV-30 VALIDATION & ACCESS CONTROL STATION

TIBA's CV-30 Validation & Access Control Station is a multi-purpose terminal for high-throughput ticketless lane operations.

The CVS-30 device is ideal for nested parking areas or for permit parking.

The CV-30 supports License Plate Recognition, Mag-Stripe & Mifare hotel key cards, employee or student credentials, loyalty cards, driver licenses, eValidations and more.

Users can self-validate tickets or control access through entrance doors.

The CV-30 features a hinged front panel for easy maintenance, easy-to-follow printed and electronic customer prompts, plus analog, digital and VoIP intercom station options.



FEATURES*

- 4.3" color TFT customer display
- Stainless steel construction
- Mag-Stripe & Proximity card readers
- Thermal receipt printer
- QR barcode scanner
- Data line surge protection
- Thermostat controlled heater
- Ruggedized stainless steel
- ADA compliant
- CE, FCC, CE, UL certified

APPLICATIONS & USES



Mixed usage facilities



Municipal properties



Airports, other transport facilities



Shopping malls



Hotel, Valet, event operations



Residential, commercial complexes



Sport arenas, convention centers



University, medical campuses

* Not all features are available or standard in all regions. Check with your local TIBA representative for availability.

FEATURES

Recognition Method	QR barcode scanner
Credential Technology	RFID proximity card readers
Customer Display	Hi-resolution TFT color display
Intercom	Analog, digital, VoIP sub-station options
Surge Protection	Built-in

OPERATIONS

Processor	Embedded industrial controller
Communication & Network	RS-485 industrial communication or TCP/IP (requires adapter)
Off-Line Operation	Full off-line operation supported
Remote Monitoring	Real-time transaction & events monitoring by SmartPark FMS software

HOUSING

Construction	Stainless steel
Measurements	9.4" (24.0 cm) width; 10.6" (27.0 cm) depth; 42.7" (108.6 cm) height
Weight	25 Lbs. (11.3 kg)
Color (Housing)	Standard: White RAL 9010 Custom colors available

ELECTRICAL

Voltage	100 - 240 VAC 50-60 HZ
Current	1.5A, 2.0A with heater
Power Consumption	180W, 240W with heater
Operating Voltage	12VDC



ENVIRONMENTAL CONDITIONS

Operating Temperature	-4° to 122° F (-20° to 50°C) with heater
Water Rating	IP54

REGULATORY



- Safety • UL 60950-1:2007
• CAN/CSA-C22.2 No. 60950-1-07
- EMC • CE, FCC Part 15, Subpart B, Class B

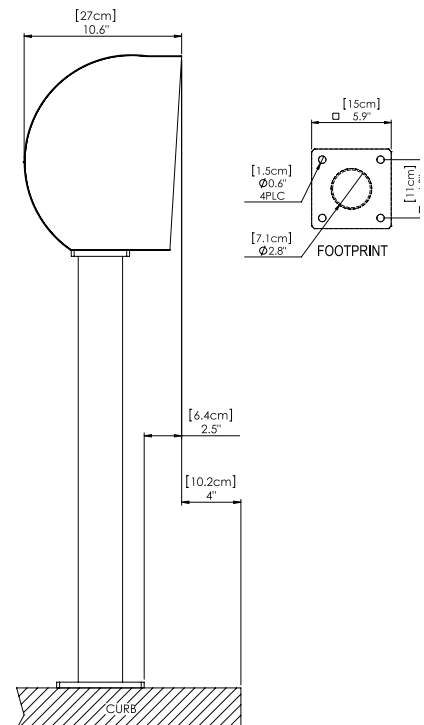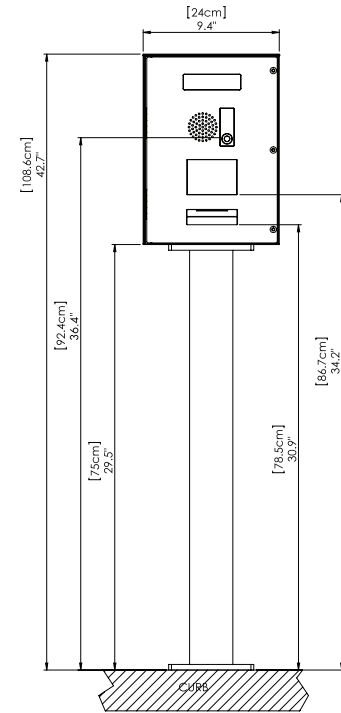

2228 Citygate Drive
Columbus, Ohio 43219 • U.S.A.

T. +1 614 328 2040

F. +1 614 864 2153

www.tibaparking.com

